

# Swimming Pool Barrier Acknowledgement Form

Permit Number: \_\_\_\_\_ Project Address: \_\_\_\_\_


I (We) acknowledge that a new swimming pool or spa or the remodeling of an existing swimming pool or spa at a private single-family home, the respective swimming pool or spa, (except as provided in H&S Section 115925), shall be enclosed by two separate pool requirements per CBC Section 3109, prior to final inspection and prior to filling the pool with water. They are:

1. An approved **BARRIER** method between the home and the pool is required (See Swimming Pool Protection Diagram below). Please choose and initial at least **TWO** of the following seven drowning prevention features below:
  1. \_\_\_\_\_ An enclosure that meets the requirements of Section 115923 and isolates the swimming pool or spa from the private single-family home.
  2. \_\_\_\_\_ Removable mesh fencing that meets American Society for Testing and Materials (ASTM) Specifications F2286 standards in conjunction with a gate that is self-closing and self-latching and can accommodate a key lockable device.
  3. \_\_\_\_\_ An approved safety pool cover, as defined in subdivision (d) of Section 115921.
  4. \* \_\_\_\_\_ Exit alarms on the private single-family home's doors that provide direct access to the swimming pool or spa. The exit alarm may cause either an alarm noise or a verbal warning, such as a repeating notification that "the door to the pool is open."
  5. \* \_\_\_\_\_ A self-closing, self-latching device with a release mechanism placed no lower than 54 inches above the floor on the private single-family home's doors providing direct access to the swimming pool or spa.
  6. \_\_\_\_\_ An alarm that, when placed in a swimming pool or spa, will sound upon detection of accidental or unauthorized entrance into the water. The alarm shall meet and be independently certified to the ASTM Standard F2208 "Standard Safety Specification for Residential Pool Alarms," which includes surface motion, pressure, sonar, laser, and infrared type alarms. A swimming protection alarm feature designed for individual use, including an alarm attached to a child that sounds when the child exceeds a certain distance or becomes submerged in water, is not a qualifying drowning prevention safety feature.
  7. \_\_\_\_\_ Other means of protection, if the degree of protection afforded is equal to or greater than that afforded by any of the features set forth above and has been independently verified by an approved testing laboratory as meeting standards for those features established by the ASTM or the American Society of Mechanical Engineers (ASME).

\* - Features 4 and 5 cannot be used together

2. Approved ENCLOSURE requirements. The requirements below are intended to keep children from entering the pool area from around the property lines. (See Swimming Pool Protection Diagram below)

1. Any access gates through the enclosure open away from the swimming pool and are self-closing with a self-latching device placed no lower than 60 inches above the ground.
2. A minimum height of 60 inches.
3. A maximum vertical clearance from the ground to the bottom of the enclosure of two inches.
4. Gaps or voids, if any, do not allow passage of a sphere equal to or greater than four inches in diameter.
5. An outside surface free of protrusions, cavities, or other physical characteristics that would serve as handholds or footholds that could enable a child below the age of five years to climb over.

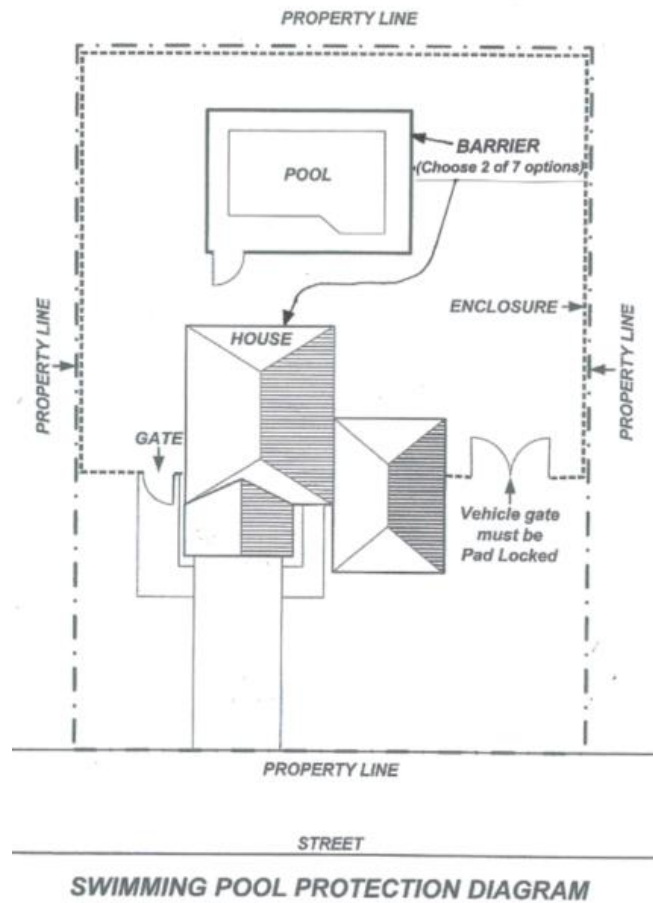

I understand that not having two of the above initialed drowning prevention safety features installed at the time of the Pre-Plaster inspection will constitute a violation of California Health and Safety Code – The California Swimming Pool Safety Act [115920 – 115929].

**Acknowledgement:**

Contractor Signature	Date	Owner Signature	Date
Contractor Name (please print)	Date	Owner Name (please print)	Date