

# Blueprint for a Clean Bay

## Best Management Practices for the Construction Industry

Remember: The property owner and the contractor share ultimate responsibility for the activities that occur on a construction site. You may be held responsible for any environmental damage caused by your subcontractors or employees.



### Preventing Pollution: It's Up to Us

In the Santa Clara Valley, storm drains transport water directly to local creeks and San Francisco Bay without treatment. Stormwater pollution is a serious problem for wildlife dependent on our creeks and bays and for the people who live near polluted streams or bays. Common sources of this pollution include spilled oil, fuel, and fluids from vehicles and heavy equipment; construction debris; sediment created by erosion; landscaping runoff containing pesticides or weed killers; and materials such as used motor oil, antifreeze, and paint products that people pour or spill into a street or storm drain.



Thirteen valley municipalities have joined together with Santa Clara County and the Santa Clara Valley Water District to educate local residents and businesses and fight stormwater pollution. This "blueprint" summarizes "Best Management Practices (BMPs)" for stormwater pollution prevention.

### General Construction and Site Supervision

#### Who should use this information?

- General Contractors
- Site Supervisors
- Inspectors
- Home Builders
- Developers
- Homeowners



#### Doing the Job Right General Principles

- Keep an orderly site and ensure good housekeeping practices are used.
- Maintain equipment properly.
- Cover materials when they are not in use.
- Keep materials away from streets, storm drains and drainage channels.
- Ensure dust control water doesn't leave site or discharge to storm drains.

#### Advance Planning To Prevent Pollution

- Schedule excavation and grading activities for dry weather periods. To reduce soil erosion, plant temporary vegetation or place other erosion controls before rain begins. Use the *Erosion and Sediment Control Field Manual*, available from the Regional Water Quality Control Board San Francisco Bay Region, as a reference.
- Control the amount of runoff crossing your site (especially during excavation!) by using terms or temporary or permanent drainage ditches to divert water flow around the site. Reduce stormwater runoff velocities by constructing temporary check dams or berms where appropriate.
- Train your employees and subcontractors. Make sure everyone who works at the construction site is familiar with this information. Inform subcontractors about the stormwater requirements and their own responsibilities. Use BAASMA, *Blueprint for a Clean Bay*, a construction best

### Spill Response Agencies:

In the City of Sunnyvale, DIAL 9-1-1.  
State Office of Emergency Service  
Warning Center (24 hours)  
..... 1-800-852-7550  
Santa Clara County Environmental  
Health Services  
..... (408) 299-6930

### Local Pollution Control Agencies:

County of Santa Clara  
Pollution Prevention Program  
..... (408) 441-1195  
County of Santa Clara Integrated Waste  
Management Program  
..... (408) 441-1198  
Santa Clara County Hazardous  
Waste Program  
..... (408) 299-7300  
*For information on the disposal of hazardous waste*  
County of Santa Clara District Attorney  
Environmental Crimes Hotline  
..... (408) 299-TIPS  
Santa Clara Valley Water District  
..... (408) 265-2600  
Santa Clara Valley Water  
District Pollution Hotline  
..... 1-888-510-5151

### Small Business Hazardous Waste Disposal Program

Santa Clara County businesses that generate less than 27 gallons or 220 pounds of hazardous waste per month are eligible to use Santa Clara County's Small Business Hazardous Waste Disposal Program. Call (408) 299-7300 for a quote, more information or guidance on disposal.

management practices guide available from the Santa Clara Valley Urban Runoff Pollution Prevention Program, and California Storm Water Quality Association Stormwater Best Management Practice Handbook; Construction; (Jan 2003) as references.

#### Good Housekeeping Practices

- Designate one area of the site for auto parking, vehicle refueling, and routine equipment maintenance. The designated area should be well away from streams or storm drain inlets, bermed if necessary. Make major repairs off site.
- Keep materials out of the rain – prevent runoff contamination at the source. Cover exposed piles of soil or construction materials with plastic sheeting or temporary roofs. Before it rains, sweep and remove materials from surfaces that drain to storm drains, creeks, or channels.
- Keep pollutants off exposed surfaces. Place trash cans and recycling receptacles around the site to minimize litter.
- Clean up leaks, drips and other spills immediately so they do not contaminate soil or groundwater or leave residue on paved surfaces.
- Never hose down "dirty" pavement or surfaces where materials have spilled.
- Use dry cleanup methods whenever possible. If you must use water, use just enough to keep the dust down.
- Cover and maintain dumpsters. Check frequently for leaks. Place dumpsters under roofs or cover with tarps or plastic sheeting secured around the outside of the dumpster. Never clean out a dumpster by hosing it down on the construction site.

- Place portable toilets away from storm drains. Make sure portable toilets are in good working order. Check frequently for leaks.

#### Materials/Waste Handling

- Practice Source Reduction – minimize waste when you order materials. Order only the amount you need to finish the job.
- Use recyclable materials whenever possible. Arrange for pick-up of recyclable materials such as concrete, asphalt, scrap metal, solvents, degreasers, cleaned vegetation, paper, rock, and vehicle maintenance materials such as used oil, antifreeze, batteries, and tires.
- Dispose of all wastes properly. Many construction materials and wastes, including solvents, water-based paints, vehicle fluids, broken asphalt and concrete, wood, and cleared vegetation can be recycled. (See Sunnyvale Recycling Program information listed above.) Materials that cannot be recycled must be taken to an appropriate landfill or disposed of as hazardous waste. Never bury waste materials or leave them in the street or near a creek or stream bed.

#### Permits

- In addition to local grading and building permits, you will need to obtain coverage under the State's General Construction Activity Stormwater Permit if your construction site's disturbed area totals 1 acre or more. Information on the General Permit can be obtained from the Regional Water Quality Control Board.

### Painting and Application of Solvents and Adhesives

#### Who should use this information?

- Painters
- Paperhangers
- Plasterers
- Graphic Artists
- Dry Wall Crews
- Floor Covering Installers
- General Contractors
- Home Builders
- Developers
- Homeowners



#### Storm Drain Pollution from Paints, Solvents, and Adhesives

All paints, solvents, and adhesives contain chemical that are harmful to wildlife in local creeks, San Francisco Bay, and the Pacific Ocean. Toxic chemicals may come from liquid or solid products or from cleaning residues or rags. Paint material and wastes, adhesives and cleaning fluids should be recycled when possible, or disposed of properly to prevent these materials from flowing into storm drains and watercourses.

#### Doing the Job Right Handling Paint Products

- Keep all liquid paint products and wastes away from the gutter, street, and storm drains. Liquid residues from paints, thinners, solvents, glues, and cleaning fluids are hazardous wastes and must be disposed of as hazardous. Contact the Santa Clara County Hazardous Waste Program at (408) 299-7300.
- Wash water from painted buildings constructed before 1978 can contain high amounts of lead, even if paint chips are not present. Before you begin stripping paint or cleaning pre-1978 building exteriors with water under high pressure, test paint for lead by taking paint scrapings to a local laboratory. See Yellow Pages for a state-certified laboratory.
- If there is loose paint on the building, or if the paint tests positive for lead, block storm drains. Check with the wastewater treatment plant to determine whether you may discharge water to the sanitary sewer, or if you must send it offsite for disposal as hazardous waste.

#### Paint Removal

- Buildings constructed before 1978 may have lead paint in them. Test paint for lead by taking samples to a local environmental testing laboratory to determine if removed paint must be disposed of as hazardous waste.
- Paint chips and dust from non-hazardous dry stripping and sand blasting may be swept up or collected in plastic drop cloths and disposed of as trash.
- Chemical paint stripping residue and chips and dust from marine paints or paints containing lead, mercury or tributyl tin must be disposed of as hazardous wastes. Lead based paint removal requires a state-certified contractor.
- When stripping or cleaning building exteriors with high-pressure water, block storm drains. Direct wash water onto a dirt area, or check Sunnyvale Water Pollution Control Plant (408) 730-7270 to find out if you can collect (mop or vacuum) building cleaning water and dispose to the sanitary sewer. Sampling of the water may be required to assist the wastewater treatment authority in making its decision.

#### Painting Cleanup

- Never clean brushes or rinse paint containers into a street, gutter, storm drain, French drain, or stream.
- For water-based paints, paint out brushes to the extent possible, and rinse into a drain that goes to the sanitary

- sewer. Never pour paint down a storm drain. Dispose of excess liquids and residue as hazardous waste.
- For oil-based paints, paint out brushes to the extent possible and clean with thinner or solvent in a proper container. Filter and reuse thinners and solvents. Dispose of excess liquids and residue as hazardous waste.
- When thoroughly dry, empty paint cans, used brushes, rags, and drop cloths may be disposed of as garbage in a sanitary landfill. Leave lids off paint cans so the refuse collector can see that they are empty. Empty, dry paint cans also may be recycled as metal.
- Dispose of empty aerosol paint cans as hazardous waste or at household hazardous waste collection events.

#### Recycle/Reuse Leftover Paints Whenever Possible

- Donate excess water-based (latex) paint for reuse. Call the Santa Clara County Hazardous Waste Program at (408) 299-7300 for details.
- Reuse leftover oil-based paint. Dispose of non-recyclable thinners, sludge and unwanted paint, as hazardous waste.
- Unopened cans of paint may be able to be returned to the paint vendor. Check with the vendor regarding its "buy-back" policy.

### Landscaping, Gardening, and Pool Maintenance

#### Who should use this information?

- Landscapers
- Gardeners
- Swimming Pool/Spa Service and Repair Workers
- General Contractors
- Home Builders
- Developers
- Homeowners



#### Storm Drain Pollution from Landscaping and Swimming Pool Maintenance

Many landscaping activities expose soils and increase the likelihood that earth and garden chemicals will run off into the storm drains during irrigation or when it rains. Swimming pool water containing chlorine and copper-based algicides should never be discharged to storm drains. These chemicals are toxic to aquatic life.

#### Doing the Job Right General Business Practices

- Protect stockpiles (e.g. asphalt, sand, or soil) and landscaping materials from wind and rain by storing them under tarps or secured plastic sheeting.
- Store pesticides, fertilizers, and other chemicals indoors or in a shed or storage cabinet.
- Schedule grading and excavation projects during dry weather.
- Use temporary check dams or ditches to divert runoff away from storm drains.
- Protect storm drains with sandbags or other sediment controls.
- Revegetation is an excellent form of erosion control for any site. Replant as soon as possible with temporary vegetation such as grass seed.

#### Landscaping/Garden Maintenance

- Consider using Integrated Pest Management Techniques. Use pesticides sparingly, according to instructions on the label. Rinse empty containers, and use rinsewater as product. Dispose of rinsed, empty containers in the trash.
- Dispose of unused pesticides as hazardous waste.

- Curbside pickup of yard waste is provided for Sunnyvale residences. Place yard waste in approved containers at curbside for pickup on waste collection days. Commercial entities may take yard waste to the Sunnyvale SmaRT station for recycling. Contact the Sunnyvale Recycling Program (408) 730-7262 for further information.
- Collect lawn and garden clippings, pruning waste, and tree trimmings. Chip if necessary, and compost if possible.
- Do not blow or rake leaves, etc. into the street, or place yard waste in gutters or on dirt shoulders. Sweep up any leaves, litter or residue in gutters or on street.

#### Pool/Fountain/Spa Maintenance Draining Pools or Spas


When it's time to drain a pool, spa, or fountain, please be sure to call the Sunnyvale Water Pollution Control Plant (408) 730-7270 before you start for further guidance on flow rate restrictions, backflow prevention, and handling special cleaning waste (such as acid wash). Discharge flows should be kept to the low levels typically possible through a garden hose. Higher flow rates may be prohibited by local ordinance.

#### Filter Cleaning

- Never clean a filter in the street or near a storm drain. Rinse cartridge and diatomaceous earth filters onto a dirt area, and spade filter residue into soil. Dispose of spent diatomaceous earth in the garbage.
- If there is no suitable dirt area, call the Sunnyvale Water Pollution Control Plant (408) 730-7270 for instructions on discharging filter backwash or rinsewater to the sanitary sewer.

### Earth-Moving and Dewatering Activities

#### Who should use this information?

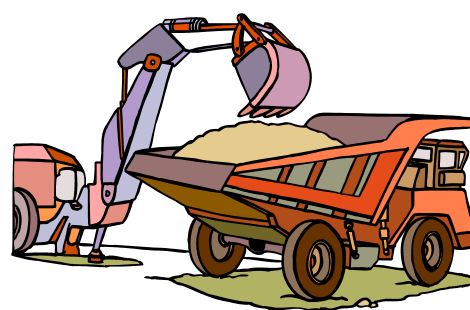

- Bulldozer, Back Hoe, and Grading Machine Operators
- Dump Truck Drivers
- Site Supervisors
- General Contractors
- Home Builders
- Developers

#### Storm Drain Pollution from Earth-Moving Activities

Soil excavation and grading operations loosen large amounts of soil that can flow or blow into storm drains when handled improperly. Sediments in runoff can clog storm drains, smother aquatic life, and destroy habitats in creeks and the Bay. Effective erosion control practices reduce the amount of runoff crossing a site and slow the flow with check dams or roughened ground surfaces.

Contaminated groundwater is a common problem in the Santa Clara Valley. Depending on soil types and site history, groundwater pumped from construction sites may be contaminated with toxics (such as oil or solvents) or laden with sediments. Any of these pollutants can harm wildlife in creeks or the Bay, or interfere with wastewater treatment plant operation. Discharging sediment-laden water from a dewatering site into any water of the state without treatment is prohibited.

#### Doing the Job Right General Business Practices

- Schedule excavation and grading work during dry weather.
- Perform major equipment repairs away from the job site.
- When refueling or vehicle/equipment maintenance must be done on site, designate a location away from storm drains.
- Do not use diesel oil to lubricate equipment parts, or clean equipment.

#### Practices During Construction

- Remove existing vegetation only when absolutely necessary. Plant temporary vegetation for erosion control on slopes or where construction is not immediately planned.
- Protect downslope drainage courses, streams, and storm drains with wattles, or temporary drainage swales. Use check dams or ditches to divert runoff around excavations. Refer to the Regional Water Quality Control Board's *Erosion and Sediment Control*

*Field Manual* for proper erosion and sediment control measures, and California Stormwater Quality Association Stormwater Best Management Practice Handbook (construction, 2003)

- Cover stockpiles and excavated soil with secured tarps or plastic sheeting.

#### Dewatering Operations Check for Toxic Pollutants

- Check for odors, discoloration, or an oily sheen on groundwater.
- Call your local wastewater treatment agency and ask whether the groundwater must be tested.
- If contamination is suspected, have the water tested by a certified laboratory.
- Depending on the test results, you may be allowed to discharge pumped groundwater to the storm drain (if no sediments present) or sanitary sewer. OR, you may be required to collect and haul pumped groundwater offsite for treatment and disposal at an appropriate treatment facility.

#### Check for Sediment Levels

- If the water is clear, the pumping time is less than 24 hours, and the flow rate is less than 20 gallons per minute, you may pump water to the street or storm drain.
- If the pumping time is more than 24 hours and the flow rate greater than 20 gpm, call your local wastewater treatment plant for guidance.
- If the water is not clear, solids must be filtered or settled out by pumping to a settling tank prior to discharge. Options for filtering include:
  - Pumping through a perforate pipe sunk part way into a small pit filled with gravel;
  - Pumping from a bucket placed below water level using a submersible pump;
  - Pumping through a filtering device such as a swimming pool filter or filter fabric wrapped around end of suction pipe.
- When discharging to a storm drain, protect the inlet using a barrier of burlap bags filled with drain rock, or cover inlet with filter fabric anchored under the grate. OR pump water through a grassy swale prior to discharge.

#### Detecting Contaminated Soil or Groundwater

Contaminated groundwater is a common problem in the Santa Clara Valley. It is essential that all contractors and subcontractors involved know what to look for in detecting contaminated soil or groundwater, and testing ponded groundwater before pumping. Watch for any of these conditions:


1. Unusual soil conditions, discoloration or odor.
2. Abandoned underground tanks.
3. Abandoned wells.
4. Buried barrels, debris or trash.

If any of these are found follow the procedures below.

### Fresh Concrete and Mortar Application

#### Who should use this information?

- Masons and Bricklayers
- Sidewalk Construction Crews
- Patio Construction Workers
- Construction Inspectors
- General Contractors
- Home Builders
- Developers
- Concrete Delivery/Pumping Workers

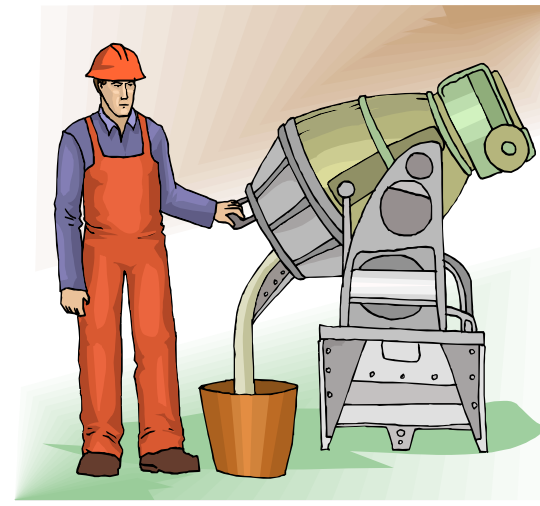

#### Storm Drain Pollution from Fresh Concrete And Mortar Applications

Fresh concrete and cement-related mortars that wash into lakes, streams, or estuaries are toxic to fish and the aquatic environment. Disposing of these materials to the storm drains or creeks can block storm drains, causes serious problems, and is prohibited by law.

### Roadwork and Paving

#### Who should use this information?

- Road Crews
- Driveway/Sidewalk/Parking Lot Construction Crews
- Seal Coat Contractors
- Operators of Grading Equipment, Paving Machines, Dump Trucks, Concrete Mixers
- Construction Inspectors
- General Contractors
- Developers
- Home Builders



#### Storm Drain Pollution from Roadwork

Road paving, surfacing, and pavement removal happen right in the street, where there are numerous opportunities for asphalt, saw-cut slurry, or excavated material to illegally enter storm drains. Extra planning is required to store and dispose of materials properly and guard against pollution of storm drains, creeks, and the Bay.

#### Doing the Job Right General Business Practices

- Develop and implement erosion/sediment control plans for roadway embankments.
- Schedule excavation and grading work during dry weather.
- Check for and repair leaking equipment.
- Perform major equipment repairs at designated areas in your maintenance yard, where cleanup is easier. Avoid performing equipment repairs at construction sites.
- When refueling or when vehicle/equipment maintenance must be done on site, designate a location away from storm drains and creeks.
- Do not use diesel oil to lubricate equipment parts or clean equipment.
- Recycle used oil, concrete, broken asphalt, etc. whenever possible, or dispose of properly.
- Take broken up concrete to a local recycling facility. Call the Sunnyvale Recycling Program at (408) 730-7262 for information.

#### During Construction

- Avoid paving and seal coating in wet weather, or when rain is forecast, to prevent fresh materials from contacting stormwater runoff.
- Cover and seal catch basins and manholes when applying seal coat, slurry seal, fog seal, or similar materials.
- Protect drainage ways by using earth dikes, sand bags, or other controls to divert or trap and filter runoff.
- Never wash excess material from exposed aggregate concrete or similar treatments into a street or storm drain. Collect and recycle, or dispose to dirt area.
- Cover stockpiles (asphalt, sand, etc.) and other construction materials with plastic tarps. Protect from rainfall and prevent runoff with temporary roofs or plastic sheets and berms.
- Park paving machines over drip pans or absorbent material (cloth, rags, etc.) to catch drips when not in use.
- Clean up all spills and leaks using "dry" methods (with absorbent materials and/or rags) Dig up, remove, and properly dispose of contaminated soil.

- Collect and recycle or appropriately dispose of excess abrasive gravel or sand.
- Avoid over-application by water trucks for dust control.


#### Asphalt/Concrete Removal

- Avoid creating excess dust when breaking asphalt or concrete.
- After breaking up old pavement, be sure to remove all chunks and pieces. Make sure broken pavement does not come in contact with rainfall or runoff.
- When making saw cuts, use as little water as possible. Shovel or vacuum saw-cut slurry and remove from the site. Cover or protect storm drain inlets during saw-cutting. Sweep up, and properly dispose of, all residues.
- Sweep, never hose down streets to clean up tracked dirt. Use a street sweeper or vacuum truck. Do not dump vacuumed liquor in storm drains.

### Heavy Equipment Operation

#### Who should use this information?

- Vehicle and Equipment Operators
- Site Supervisors
- General Contractors
- Home Builders
- Developers

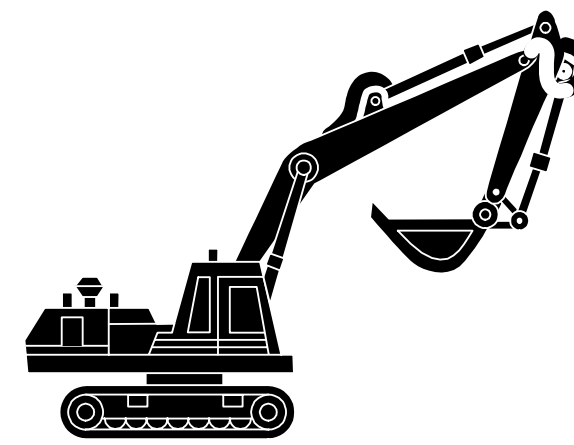

#### Stormwater Pollution from Heavy Equipment on Construction Sites

Poorly maintained vehicles and heavy equipment that leak fuel, oil, antifreeze or other fluids on the construction site are common sources of storm drain pollution. Prevent spills and leaks by isolating equipment from runoff channels, and by watching for leaks and other maintenance problems. Remove construction equipment from the site as soon as possible.

#### Spill Cleanup

- Clean up spills immediately when they happen.
- Never hose down "dirty" pavement or impermeable surfaces where fluids have spilled. Use dry cleanup methods (absorbent materials, cat litter, and/or rags) whenever possible and properly dispose of absorbent materials.
- Sweep up spilled dry materials immediately. Never attempt to "wash them away" with water, or bury them.
- Clean up spills on dirt areas by digging up and properly disposing of contaminated soil.
- Report significant spills to the appropriate local spill response agencies immediately. In Sunnyvale, dial 9-1-1 if hazardous materials might enter the storm drain.
- If the spill poses a significant hazard to human health and safety, property or the environment, you must also report it to the State Office of Emergency Services 1-800-852-7500.

#### Doing the Job Right Site Planning and Preventive Vehicle Maintenance

- Designate one area of the construction site, well away from streams or storm drain inlets, for auto and equipment parking, refueling, and routine vehicle and equipment maintenance. Contain the area with berms, sand bags, or other barriers.
- Maintain all vehicles and heavy equipment. Inspect frequently for and repair leaks.
- Perform major maintenance, repair jobs, and vehicle and equipment washing off site where cleanup is easier.
- If you must drain and replace motor oil, radiator coolant, or other fluids on site, use drip pans or drop cloths to catch drips and spills. Collect all spent fluids, store in separate containers. Recycle them wherever possible, otherwise, dispose of them as hazardous wastes.
- Do not use diesel oil to lubricate equipment parts, or clean equipment. Use only water for any onsite cleaning.
- Cover exposed fifth wheel hitches and other oily or greasy equipment during rain events.
- Use as little water as possible for dust control. Ensure water used doesn't leave silt or discharge to storm drains.